

OFFSET, SMALL FORMAT AND LARGE FORMAT

With these instructions you can correctly prepare a file for printing in **OK-PRINT**.

Use the check list to quickly check all the steps and, If in doubt, please refer to the section "Further information".

CHECK LIST

1 TEMPLATE

Always download the template for the product you have purchased from the website and use it as a basis for positioning your graphics: this will make it easier to create correctly a file for printing.

2 ADDITIONAL INFORMATION

Vector lines must be a minimum of **0.25 pt**. Fonts must be embedded in the PDF or converted to curves/lines. The minimum (below which we cannot guarantee perfect reproduction in print) is **6 pt**.

3 COLOURS

All files should be sent in **CMYK** (cyan, magenta, yellow, black) with colour profile Fogra 39.

4 RESOLUTION

A resolução ideal pThe optimum resolution for print files is **250 a 300 dpi**.

5 PDF

Our systems can only read PDF files in 1:1 scale (not password protected).

6 MARGINS AND BLEED

Download the template of the product you have purchased, the **BLEED** will already be correctly applied at 2 mm from the margin. The distance of the texts from the cut line must be at least 3 mm also indicated in the file (**SafetyMargin**).



DOWNLOAD
THE TEMPLATE



INSERT THE
GRAPHICS IN LAYER



SAVE THE PDF

FOR MORE INFORMATION

1 TEMPLATE

Always download the template for the product you have purchased from the website and use it as a basis for position your graphic: this will make it easier to create a file correctly for printing. Insert your graphic in the Layout layer. Be careful not to modify the page dimensions and insert your graphics.

2 ADDITIONAL INFORMATION

Vector lines should be at least **0.25 pt**. We advise you not to position frames and passpartouts too close to the margins to avoid inaccuracies due to cropping tolerances.

Fonts should be embedded in the PDF or converted to curves/lines. The minimum character size (below which we cannot guarantee perfect reproduction in print) is **6 pt**.

When printing overprinted opaque colours, the top colour usually covers the one below. Overprinting prevents this from happening and causes the inks to overlap (creating a see-through effect in the top ink). To avoid unexpected colour results, check that there are no overprinted objects or texts in your file.




3 COLOURS

All files must be sent in CMYK (cyan, magenta, yellow, black) with the colour profile Fogra 39. or Images in RGB PANTONE colours will be automatically converted by a standard colour separation profile.

5 PDF


Our systems only read PDF files in 1:1 scale (not password protected). Save the PDF in high quality, without downsampling and keeping the layers separate.

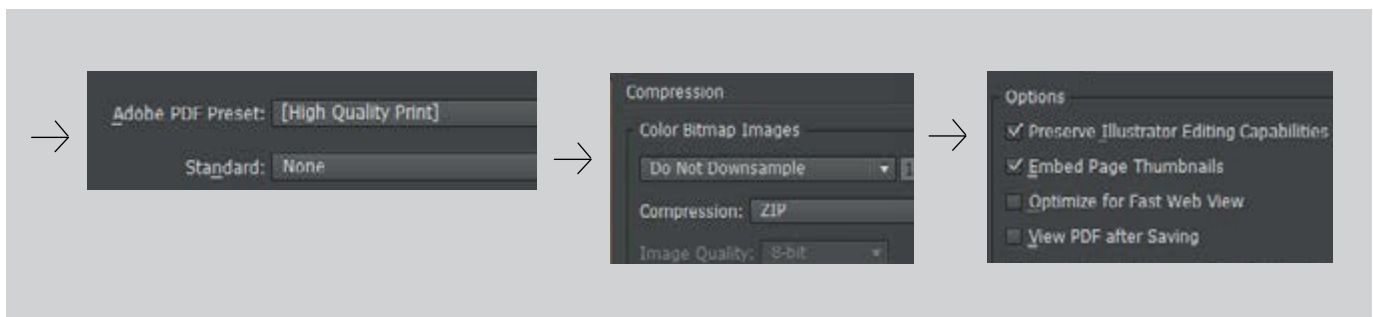

6 MARGINS AND BLEED

Download the template of the product you have purchased, the **BLEED** will already be correctly applied at 2 mm from the margin. The distance of the texts from the cut line must be at least 3 mm also indicated in the file (**SafetyMargin**).

MARGINS AND BLEED

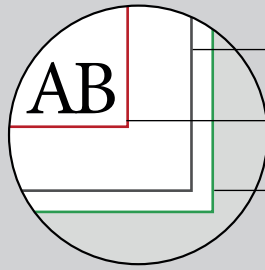

cut line

distance of texts from distance of texts to the cut line (**SafetyMargin**): 3 mm
bleed margins: 2 mm




7 FORMAT ORIENTATION

The orientation of the pages of the PDF must correspond to the choice indicated in the order (horizontal or vertical). All pages must have the same orientation. Once the PDF has been saved, please not to rotate the pages with Acrobat.



ATTENTION: in case of double-sided printing, the sheets are rotated around their vertical axis, take this into account when positioning the text, also bearing in mind the position the text, also taking into account the orientation selected in the estimate.

Vertical



Horizontal

